
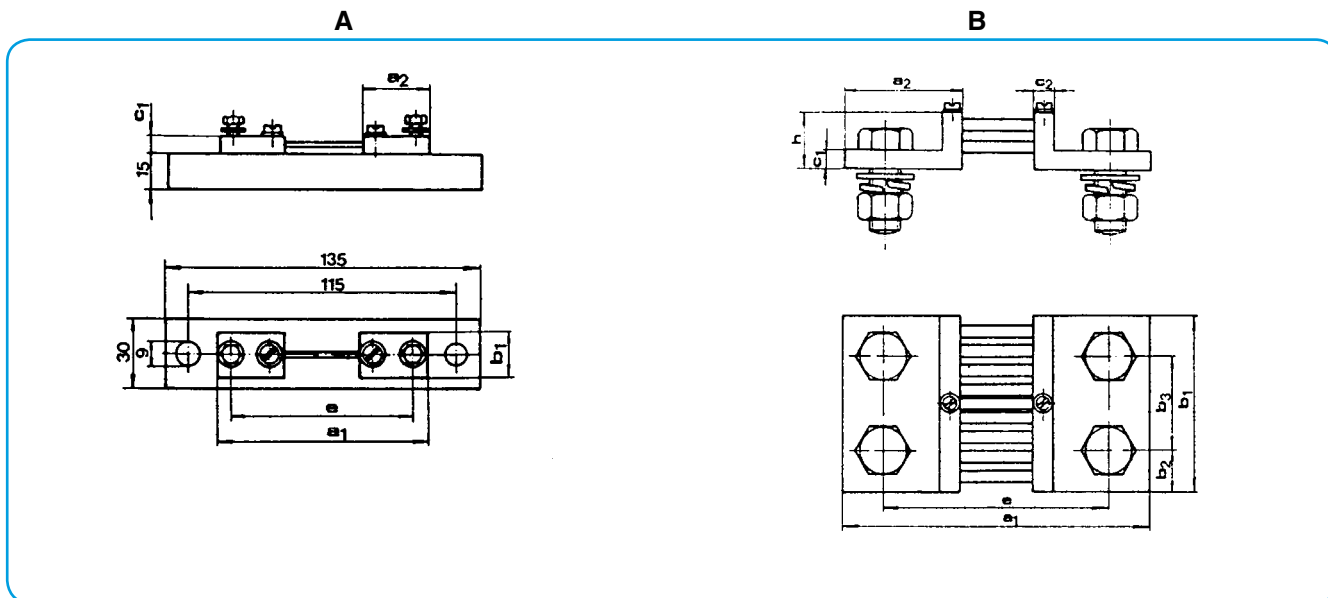


SHUNTS



Dimensions (mm)	Current through separate shunt (A)							
	1, 1.5, 2.5, 4 6 10 15 25	40 60 100 150	250	400	600	1000	1500	2500
	Possibility A				Possibility B			
a1	90	100	145			165		
a2	28	33	55	65				
b1	20	20	30	40	40	60	90	120
b2	-	-	15	20	20	30	21	30
b3	-	-	-			-	48	60
c1	8	8	10					
c2	-	-	10					
e	78	80	105			115		
h1	-				30			
No. of terminals	2 x 1					2 x 2		
Fixing screw	M5 x 12	M8 x 15	M12 x 40	M16 x 45	M16 x 45	M20 x 50	M16 x 45	M20 x 50
Washer DIN 125	5.3	8.4	13.5	17	17	21	17	21
Spring washer DIN 127	-		12	16	16	20	16	20
Nut	-		M12	M16	M16	M20	M16	M20
Voltage terminals	2 cylindrical screws M5 x 8 (DIN 84-4) and 2 washers 5.3							